

SPOTTER

NETWORKEDIO™ - Command and Control System

Resilient Reliable Secure

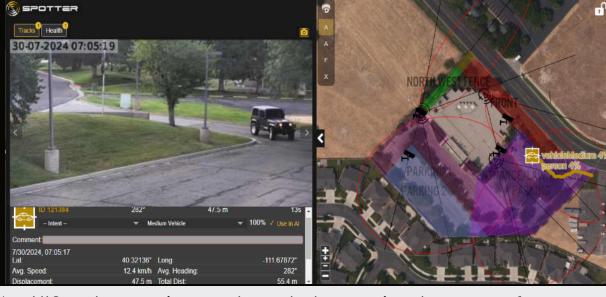

NetworkedIO[™] or NIO reduces nuisance alarms by harnessing the power of filters and advanced AI to identify only the targets of interest the customer wants.

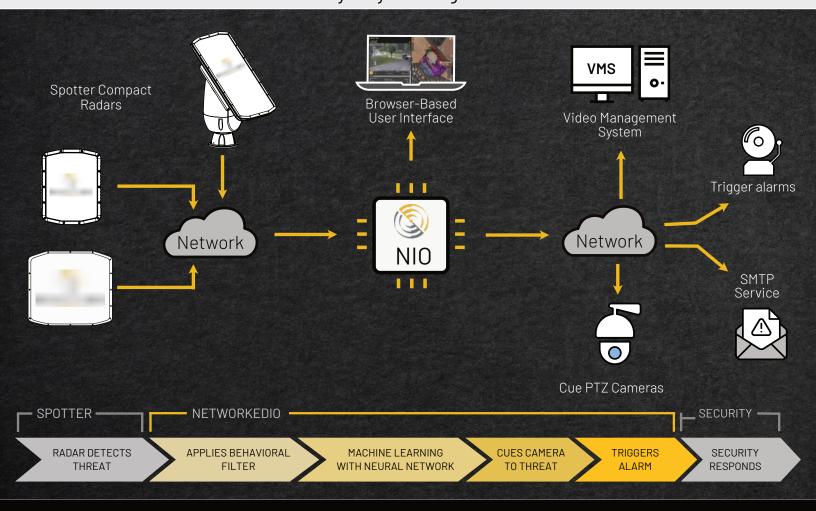







NIO RADAR MANAGEMENT SYSTEM



NetworkedIO[™](NIO) serves as the central intelligence hub of the Spotter perimeter security system. It seamlessly connects a variety of devices such as radar sensors, cameras, video management systems (VMS), and other controllable devices to provide situational awareness and automated security responses to identified threats.

Primary Features

- Lowest nuisance alarms in the industry
- Advanced Al classification
- Customizable filters
- System health alerts
- Integration with major VMS and annunciator systems
- Integration friendly API
- Site Level Management All On One Screen

			zever rianagement in on one coreen		
	ر د مشعه د کې مخه ا		VM	APP	
NETWORKED IO ™ Specifications	NIO-DINS	NIO Appliance	NIO-VM	NIO-App	
DIMENSIONS	6.64 x 5.19 x 1.90 in 168 x 132 x 48 mm	1U Rack Mount 1.7 x 18.7 x 29.47 in 143 x 482 x 750 mm	N/A	N/A	
WEIGHT	2.9 lbs 1.3 kg	42 lbs 18.62 kg	N/A	N/A	
NUMBER OF DEVICES SUPPORTED	25	50	10, 25, OR 50	10, 25, OR 50	
NUMBER OF ZONES	200	200	200	200	
I/O OUTPUT ADD-ON	YES	YES	YES	YES	
SYSTEM POWER REQUIRED	18-36 VDC 12W TYPICAL, 25W MAX	100-240 VAC, 800 W	N/A	N/A	
OPERATIONAL TEMPERATURE RANGE	-40° C to 71° C -40° F to 160° F	10°C to 35°C 50°F to 86°F	N/A	N/A	
OUTPUT FORMAT	JSON, Web UI, Onvif, XML	JSON, Web UI, Onvif, XML	JSON, Web UI, Onvif, XML	JSON, Web UI, Onvif, XML	
RTSP / AI	YES	YES	YES	YES	
HARDWARE	SeaLevel Relio R1 INTEL 15 7300U RAM: 16GB HD: 128GB SSD	3rd Generation Intel Xeon Scalable Processors	N/A	N/A	
CERTIFICATIONS	FCC, RoHS, REACH	FCC Class A	N/A	N/A	

sales@spotterglobal.com 801-742-5849 spotterglobal.com





